




BENCHMARK® KN-200A Pneumatic Weld Head

The KN-200A weld head has been extensively proven in industrial environments around the world and is regarded as the “dependable workhorse” of the industry. Its proprietary fast force follow-up feature eliminates weld expulsion, preventing entrapment of ejected materials in projection welded electronic devices - a common cause of PIND (particle impact noise detection) failure. Dual cylinder design delivers over 4000 lbs of weld force. Designed to accommodate a variety of metal projection welding applications including sensors, frequency devices, filaments, heating elements, photonics packages, strain gauges and transducers.


KEY FEATURES

- Robust, low maintenance die set design
- Fast force follow-up feature maintains force during weld, eliminating weld expulsion
- Rigid construction using oil-free matched linear bushing and tie rod for precise positioning and planarity
- Simple actuation using the BENCHMARK® SS-100A pneumatic weld head controller
- Can be configured to be used with any manual or automated welding system

TYPICAL APPLICATIONS



Power devices

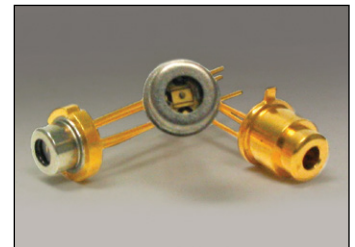

Automotive components



RF and hybrid devices



APPLICATIONS

- Opposed electrode welding applications which require fast follow-up to prevent material expulsion
- Welding ring or annular projections with a perimeter length ranging from 0.40 to 7.0 inches
- Microelectronic hermetic packaging cap to header welding requiring coplanarity

OPTIONAL FEATURES


- Integrated glovebox systems
- Vacuum - backfill options
- Integrated SS-100A weld head controller

ADVANTAGES

- Robust design
- Low maintenance
- Repeatability
- Worldwide support
- Industry proven products

TECHNICAL SPECIFICATIONS KN-200A

Description / Part Number	KN-200A-SINGLE / KN-200A-02-01	KN-200A-DUAL / KN-200A-02-02
Weld Force Range	250 - 1250 lb-F (113 - 568 kg-F)	250 - 4082 lb-F (113 - 1855 kg-F)
Throat Opening with electrode	1.32 in (33.5 mm)	1.32 in (33.5 mm)
Throat Depth	7.0 in (177.8 mm)	7.0 in (177.8 mm)
Cylinder Stroke	1.98 in (50.3 mm)	1.98 in (50.3 mm)
Weld force control	SS-100A/SINGLE	SS-100A
Electrode Holder	1 in (25.4 mm) diameter	2 in (50.8 mm) diameter
Electrodes	RWMA 3 and RWMA11	RWMA 3 and RWMA11
Dimensions (L x W x H)	14.9 in x 11.9 in x 19.8 in (377.9 mm x 301.5 mm x 502.7 mm)	14.9 in x 11.9 in x 23.4 in (377.9 mm x 301.5 mm x 594.9 mm)
Weight	95 lb (43.2 kg)	100 lb (45.5 kg)

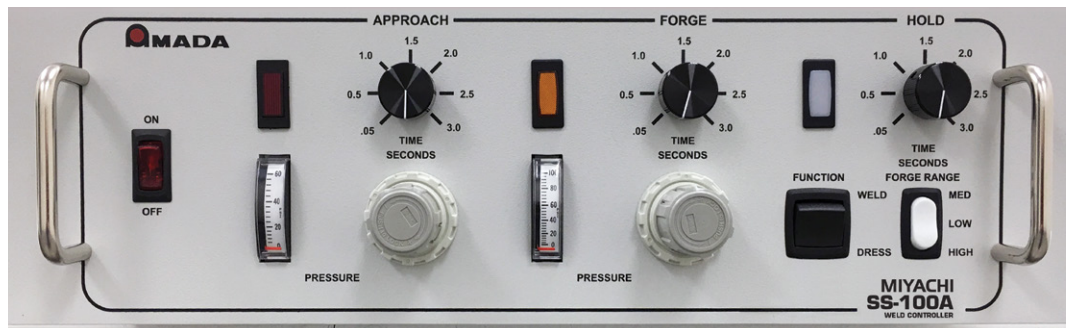

**SS-100A pneumatic
weld head controller**

TECHNICAL SPECIFICATIONS SS-100A WELD HEAD CONTROLLER

Description / Part Number	SS-100A-SINGLE / SS-100A-02-01	SS-100A-DUAL / SS-100A-02-02
Application	Single cylinder weld head	Dual cylinder weld head
Input Voltage	85 - 265 VAC / 10 A	
Weld Initiate	Pressure locked Anti Tie Down Palm Switches	
Dimensions (L x W x H)	14 in x 19 in x 5.5 in (355.6 mm x 482.6 mm x 139.7 mm)	
Weight	28 lb (12.8 kg)	30 lb (13.6 kg)

**USA Headquarters and Western Technical Center**

AMADA WELD TECH
1820 S. Myrtle Ave. • Monrovia, CA 91016 US • T: (626) 303-5676
info@amadaweldtech.com • www.amadaweldtech.com
ISO 9001:2015 Certified Company • 24/7 Repair Service: 1-866-751-7378

AMERICAS

AMADA WELD TECH
(Eastern Technical Center)
High Point, North Carolina
T: (941) 544-5762
southsales@amadaweldtech.com

AMADA WELD TECH
(Midwest Technical Center)
Detroit, Michigan
T: (248) 313-3078
midwestsales@amadaweldtech.com

AMADA WELD TECH
(Mexico Office)
El Paso, Texas
T: (915) 881-8765
mxsales@amadaweldtech.com

EUROPE
AMADA WELD TECH
GmbH
Munich, Germany
T: +49-89-839403-0
info@amadaweldtech.eu

ASIA

AMADA CO., LTD.
Isehara, Japan
T: +81-463-96-1111
amd_microweld_sales@amada.co.jp

AMADA WELD TECH
SHANGHAI CO., LTD.
Shanghai, China
T: +86-21-6448-6000
jvu@amadaweldtech.com.cn

AMADA WELD TECH KOREA CO., LTD.
Seoul, Korea
T: +82-31-8015-6810
amadasales@amadaweldtech.co.kr
sales2@amadaweldtech.co.kr

AMADA WELD TECH TAIWAN CO., LTD.
Taipei, Taiwan
T: +886-3-328-3511

AMADA (THAILAND) CO., LTD.
Bangkok, Thailand
T: +66-2170-5900
info@amada.co.th

AMADA VIETNAM CO., LTD.
Ha Noi, Vietnam
T: +84-4-6261-4583
thuyet@amada.co.jp

AMADA WELD TECH
INDIA PVT., LTD.
Bangalore, India
T: +91-80-4092-1749
info@amadaweldtech.in

Specifications subject to change without notice. Copyright© 2025 AMADA WELD TECH INC.
The material contained herein cannot be reproduced or used in any other way without the
express written permission of AMADA WELD TECH INC. All rights reserved.

follow us on:



06/25