



HF-2700A / HF-2500A

High Frequency Welding Control

HIGH RELIABILITY MICROJOINING

The HF Series high frequency weld controls address the challenges of **micro welding** for a wide range of applications. Precise control of weld energy with high speed closed loop feedback and weld quality tools ensure high yields for the most demanding welding applications.

HF Series weld controls are also geared for automation featuring exceptional repetition rates, standard I/O connections and remote programming capability.

KEY FEATURES

CONTROL FEATURES:

- Constant current, voltage, and power modes
- Monitors energy and resistance
- 2400 A maximum
- 25 kHz feedback


WELD QUALITY PROCESS TOOLS:

- Active Part Conditioning (APC)
- Pre-Weld Check
- Weld to Limits

HF-2700A ADVANCED FEATURES:

- Displacement and force monitoring
- Force control
- Envelope function
- Combo mode
- Energy and time limits


TYPICAL APPLICATIONS

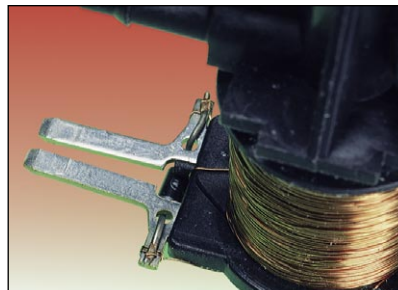

Anti-lock brake system solenoid




Critical parts fabrication

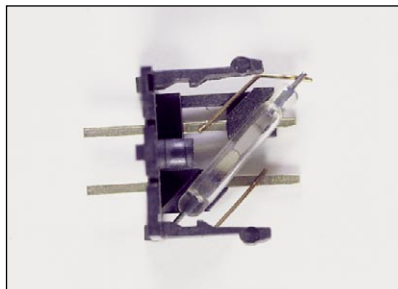

Switch assembly



Implantable device interconnects

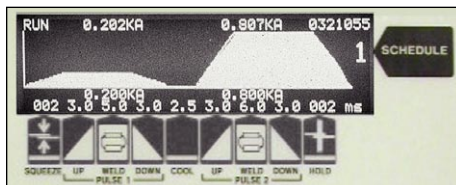

INTUITIVE, EASY-TO-USE PROGRAMMING

- Intuitive graphical user interface.
- Dual pulse waveforms programmed in current, voltage, or power control modes.
- Programming times to 100 μ sec increments provides ultimate control.
- Accurate, built-in monitor displays the graphical "trace" of weld current, voltage, power and resistance, along with numerical peak and average values.
- Easy-to-set limits establish process window for acceptable quality.
- User programmable relays can be used in conjunction with visual and audible signals for operators and automation interface.

CURRENT, VOLTAGE AND POWER FEEDBACK MODES:

Constant Voltage: (dotted green line)

- Compensates for parts misplacement and force problems
- Reduces weld splash
- Ideal for round (non-flat) parts

Monitor current

Constant Power: - - - - - (dashed orange line)


- Varies current and voltage for consistent energy
- Breaks up surface oxides and plating
- Ideal for automation to extend electrode life

Monitor current or voltage


Constant Current: _____ (solid black line)

- Delivers same current regardless of resistance changes
- Compensates for part thickness changes
- Ideal for flat parts with consistent electrode to part fit-up


Monitor voltage

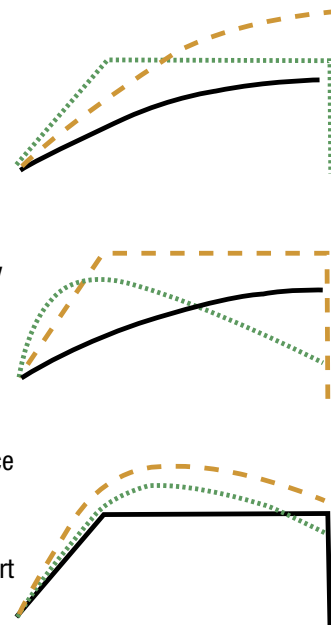

EFFECTIVE WELD MONITORING AND PROCESS TOOLS

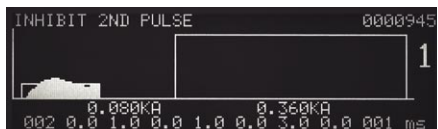


Run screen – shows that second pulse was inhibited from firing.

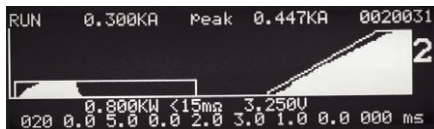


Run screen – constant power first pulse breaks through oxides.




Run screen – shows termination of weld current during weld pulse.

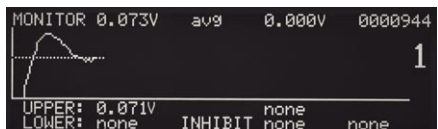

Monitor screen – shows first pulse weld voltage exceeded limit.

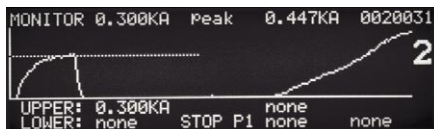

Monitor screen – first pulse time automatically compensates for varying levels of oxides.

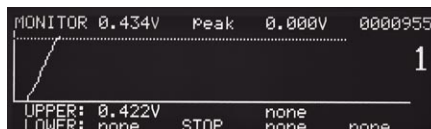

Monitor screen – shows weld voltage exceeding limit.

PRE-WELD FUNCTION

Sends an initial short, low energy pulse through the assembly, tests key electrical parameters against pre-set limits, and inhibits operation if limits are exceeded.

Advantages

- Prevents unacceptable welds
- Prevents electrode damage
- Alerts operator to weld fault
- Relay outputs can signal automation

ACTIVE PART CONDITIONER (APC)

First pulse adapts weld time to displace oxides then terminates allowing a second pulse with upslope to complete the weld, thus avoiding weld splash.

Advantages

- Brings each part to the same resistance prior to application of welding current
- Provides for consistent welding of difficult-to-weld oxidized parts
- Prevents weld splash
- Increases process yields

WELD STOP

Terminates the weld energy during the welding process if pre-set weld current or voltage limits are exceeded.

Advantages

- Prevents blow-outs and parts damage
- Prevents electrode damage
- Alerts operator to weld fault
- Relay outputs can signal automation

TECHNICAL SPECIFICATIONS

Model Number	HF-2500A/240	HF-2500A/400	HF-2500A/480	HF-2700A/240	HF-2700A/400	HF-2700A/480
Nominal line voltage (3 phase)	240 VAC	400 VAC	480 VAC	240 VAC	400 VAC	480 VAC
Line voltage range (VAC)	192 to 264	320 to 440	384 to 528	192 to 264	320 to 440	384 to 528
Input circuit rating (per phase)	25 A	20 A	13 A	25 A	20 A	13 A
Input kVA @ 3% duty cycle	30 kVA					
Output kW @ max. demand	12 kW					
Output transformer voltage @ max. rated output current	5.2 V					
Open circuit max. output voltage @ nominal line	11.5 V					
Setting ranges	Current – 100 A to 2400 A; Voltage – 0.2 V to 10 V; Power – 50 W to 10 kW					
Output current	2400 A @ 3% duty cycle					
Output feedback response time (current, voltage, power)	40 μ s					
Output regulation versus line voltage variance	2%					
Output regulation versus load resistance variance	2%					
Output repeatability current, voltage, power $\pm$ of setting	2%					
Weld period ranges	All segments except squeeze and hold 0.10 ms to 10 ms, 0.1 ms steps; 10 to 99 ms, 1 ms steps; squeeze and hold 0 to 999 ms, 1 ms steps					
Weld energy setting accuracy	Current: 2% of setting or 2 A, whichever is greater; Voltage: 2% of setting or 0.050 V, whichever is greater; Power: 5% of setting or 20 W, whichever is greater					

Weld Heat Profile Functions		
Weld pulse control	Dual pulse with independent control of current, voltage, power or combo mode (HF-2700A) on each pulse.	
Programmable weld pulse segments	Squeeze, upslope 1, weld 1, downslope 1, cool, upslope 2, weld 2, downslope 2, hold.	
Weld schedule memory	Save up to 100 different weld schedules, protected from unauthorized changes.	
Measurement parameters	Independent monitor of current, voltage, power, and resistance on each pulse. Envelope, time limits and energy monitor (HF-2700A).	
Graphic display	Back-lit LCD displays programmed and actual weld current, voltage or power, upper and lower limits, and resistance.	
Measurement selection	Peak or average	
Current measurement range/accuracy	50.0 A to 2.400 kA/±2% of reading or ±2 A, whichever is greater.	
Voltage measurement range/accuracy	0.2 V to 9.999 V/±2% of reading or ±0.05 V, whichever is greater.	
Power measurement range/accuracy	0.01 KW to 9.999 kW/±5% of reading or ±20 W, whichever is greater.	
Alarms	Display alert, four user programmable AC/DC relays; audio alarm.	
Programmable weld energy limit	Terminates weld energy when exceeding user defined current, voltage, or power limits.	
Weld pre-check	Inhibit second weld pulse when first test pulse exceeds user programmed limits.	
Active part conditioner	First pulse current limit in constant power allows second pulse to fire.	
I/O and Data Communications		
Input	Input isolation	All inputs and outputs are fully isolated.
	Control voltages	Selectable: +5 V, +24 V, sourcing or sinking inputs.
	Firing switch initiation	1-level foot switch, 2-level foot switch, mechanical or opto firing switch.
	Remote control	Remote weld schedule select, process inhibit, emergency stop.
	RS232	Change weld schedules and individual parameters.
	RS485	Change weld schedules and individual weld parameters; "Daisy Chain" unit to unit, unit(s) to host computer.
	Electrode voltage	Weld voltage signal for voltage feedback operation (0 to 10 V peak).
Weld head air valve driver	24 VAC, 1 A; timing controlled by HF-2500A/HF-2700A. Operates new EZ-AIR®.	
Alarm relays	Four user-programmable mechanical relays; programmable normally open or normally closed; contacts: 250 VAC at 5 A; 30 VDC at 5 A. Conditions: weld, end of weld, alarm, out of limits.	
Displacement Option (HF-2700A only)		
Capabilities	Part detection, final thickness measurement, set down measurement, energy stop (weld to limit)	
Accuracy of displacement readings	± 0.003 in (0.076 mm)	
Repeatability	± 1.0 %	
Maximum travel	1 in (25 mm)	
Alarm relays	Additional conditions: any LVDT, initial Lo/Hi, final Lo/Hi, displacement Lo/Hi, initial NG, displacement NG, energy stop	
Data output	Initial thickness, final thickness, displacement, and any alarm condition	
80DSPK	Attaches to TL Series weld heads. Includes LVDT, interface cable, and mount	
Force Control and Monitor (HF-2700A)		
Force input	0 - 10 V input signal from signal conditioner or load cell	
Force measurement	End of squeeze, end of hold	
Force output	0 - 10 V for use with proportional valve	
Force programming	lbs, kg. N. force can be stored by schedule	

WEIGHT & DIMENSIONS

Dimensions (W x D x H)	9 in x 18 in x 12.8 in (230 mm x 460 mm x 325 mm)
Weight	54 lb (25 kg)



USA Headquarters and Western Technical Center

AMADA WELD TECH
1820 S. Myrtle Ave. • Monrovia, CA 91016 US • T: (626) 303-5676
info@amadaweldtech.com • www.amadaweldtech.com
ISO 9001:2015 Certified Company • 24/7 Repair Service: 1-866-751-7378

AMERICAS

AMADA WELD TECH
(Eastern Technical Center)
High Point, North Carolina
T: (941) 544-5762
southsales@amadaweldtech.com

AMADA WELD TECH
(Midwest Technical Center)
Detroit, Michigan
T: (248) 313-3078
midwestsales@amadaweldtech.com

AMADA WELD TECH
(Mexico Office)
El Paso, Texas
T: (915) 881-8765
mxsales@amadaweldtech.com

EUROPE
AMADA WELD TECH
GmbH
Munich, Germany
T: +49-89-839403-0
infoe@amadaweldtech.eu

ASIA

AMADA CO., LTD.
Isehara, Japan
T: +81-463-96-1111
amd_microweld_sales@amada.co.jp

AMADA WELD TECH
SHANGHAI CO., LTD.
Shanghai, China
T: +86-21-6448-6000
jvwu@amadaweldtech.com.cn

AMADA WELD TECH KOREA CO., LTD.
Seoul, Korea
T: +82-31-8015-6810
amadasales@amadaweldtech.co.kr
sales2@amadaweldtech.co.kr

AMADA WELD TECH TAIWAN CO., LTD.
Taipei, Taiwan
T: +886-3-328-3511

AMADA (THAILAND) CO., LTD.
Bangkok, Thailand
T: +66-2170-5900
info@amada.co.th

AMADA VIETNAM CO., LTD.
Ha Noi, Vietnam
T: +84-4-6261-4583
thuyet@amada.co.jp

AMADA WELD TECH
INDIA PVT., LTD.
Bangalore, India
T: +91-80-4092-1749
info@amadaweldtech.in

Specifications subject to change without notice. Copyright© 2025 AMADA WELD TECH INC.
The material contained herein cannot be reproduced or used in any other way without the express written permission of AMADA WELD TECH INC. All rights reserved.

follow us on:

