



MD-A10000A Slave and Master


MD-A10000A/ MD-B5000A Welding Power Supplies

The MD-A10000A and MD-B5000A are transistor welding power supplies ideal for parts requiring high peak current with ultra fast rise time.

MD-A10000A can be combined with up to 12 units for combined output current. One master controls all slaves, ensuring the same weld schedule is applied to all. Built-in feedback mode ensures stable output.

The MD-B5000A features a polarity switching function that reduces the effect of the Peltier effect and improves weld uniformity.


Current rise of transistor controlled welding power supply is faster than others

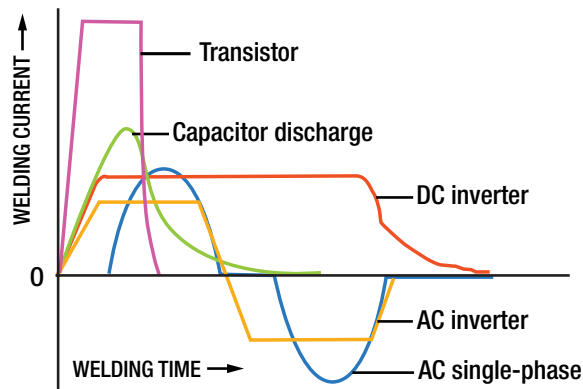

KEY FEATURES

- Integrate up to 12 units for combined output current for flexible configuration for various part sizes
- Closed loop feedback for stable output and reproducible welding results
- Control modes: Current, Voltage, Power
- Easily scalable for range of part sizes
- Fast rise time facilitates welding:
 - ♦ Automotive high strength steel with high hardness values (Usibor, etc.)
 - ♦ Conductive materials such as copper and aluminum often found in automotive battery applications

TYPICAL APPLICATIONS

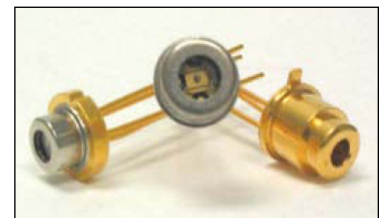

Optical sensor parts



Crystal oscillators



Projection welding of electronic components

TECHNICAL SPECIFICATIONS

Model		MD-A10000A	MD-B5000A	
Type		Standard	Polarity switchable	
Power requirements		Single Phase, 100 - 120 VAC or 200 - 240 VAC, 50/60HZ		
Power consumption		430 W max		
Feedback modes		Constant current / Constant voltage / Constant current and constant voltage		
Number of connectable units		0 - 11 units	1 unit	
Maximum current*	10.0 kA (Master unit only)		10.0KA (One master and one slave units) Master unit of MD-B5000A cannot be used alone.	
	20.0 kA (One master and one slave unit)			
	30.0 kA (One master and two slave units)			
	40.0 kA (One master and three slave units)			
	50.0 kA (One master and four slave units)			
	60.0 kA (One master and five slave units)			
	70.0 kA (One master and six slave units)			
	80.0 kA (One master and seven slave units)			
	90.0 kA (One master and eight slave units)			
	100.0 kA (One master and nine slave units)			
	110.0 kA (One master and ten slave units)			
	120.0 kA (One master and eleven slave units)			
Time setting (31 schedules)	Maximum voltage		30 V	
	Squeeze time		0000 - 9999 ms	
	Pre-weld check		0.00 - 1.00 ms	
	Upslope		0.00 - 9.99 ms	
	Weld 1 / Weld 1 & 2		0.00 - 9.99 ms	
	Cooltime		0.00 - 9.99 ms	
	Downslope		0.00 - 9.99 ms	
	Hold time		0.00 - 999 ms	
Monitor display		Weld 1 & 2 (Average current/average voltage), Weld 1 & 2 (Peak current/peak voltage), Weld 1 & 2 (Average power/average resistance) Current, Voltage, Power, Resistance waveform, schedule number		

*Maximum current output is dependent on the secondary impedance.

WEIGHT & DIMENSIONS

Dimensions (W x D x H)	6.85 in x 25.04 in x 13.78 in (174 mm x 636 mm x 350 mm)
Weight	82 lbs (37 kg)



USA Headquarters and Western Technical Center

AMADA WELD TECH
1820 S. Myrtle Ave. • Monrovia, CA 91016 US • T: (626) 303-5676
info@amadaweldtech.com • www.amadaweldtech.com
ISO 9001:2015 Certified Company • 24/7 Repair Service: 1-866-751-7378

AMERICAS

AMADA WELD TECH
(Eastern Technical Center)
High Point, North Carolina
T: (941) 544-5762
southsales@amadaweldtech.com

AMADA WELD TECH
(Midwest Technical Center)
Detroit, Michigan
T: (248) 313-3078
midwestsales@amadaweldtech.com

AMADA WELD TECH
(Mexico Office)
El Paso, Texas
T: (915) 881-8765
mxsales@amadaweldtech.com

EUROPE
AMADA WELD TECH
GmbH
Munich, Germany
T: +49-89-839403-0
info@amadaweldtech.eu

ASIA

AMADA CO., LTD.
Isehara, Japan
T: +81-463-96-1111
amd_microweld_sales@amada.co.jp

AMADA WELD TECH
SHANGHAI CO., LTD.
Shanghai, China
T: +86-21-6448-6000
jwu@amadaweldtech.com.cn

AMADA WELD TECH KOREA CO., LTD.
Seoul, Korea
T: +82-31-8015-6810
amadasales@amadaweldtech.co.kr
sales2@amadaweldtech.co.kr

AMADA WELD TECH TAIWAN CO., LTD.
Taipei, Taiwan
T: +886-3-328-3511

AMADA (THAILAND) CO., LTD.
Bangkok, Thailand
T: +66-2170-5900
info@amada.co.th

AMADA VIETNAM CO., LTD.
Ha Noi, Vietnam
T: +84-4-6261-4583
thuyet@amada.co.jp

AMADA WELD TECH
INDIA PVT., LTD.
Bangalore, India
T: +91-80-4092-1749
info@amadaweldtech.in

Specifications subject to change without notice. Copyright© 2025 AMADA WELD TECH INC.
The material contained herein cannot be reproduced or used in any other way without the express written permission of AMADA WELD TECH INC. All rights reserved.

follow us on:

